

## 55K1 DC/DC Converter

### 75-Watt Ruggedized Converter Conduction-Cooled, Single Output



#### Description

NAI's 55K1 is a 75-Watt DC/DC Converter that accepts a +28 VDC input. This COTS unit provides full-power output and a single output.. Standard features include remote error sensing; remote digital (TTL) turn on/off; and protection against transients, over-voltage, over-current, and short-circuits. Options such as ESS vibration testing and choice of output voltages are available, and additional options and special units can be ordered.

This conduction-cooled, switching power supply is specifically designed with NAVMAT component derating for rugged defense and industrial applications. It is also designed to meet the many harsh environmental requirements of military applications.



#### Features

- Ideal for rugged, conduction-cooled, military applications
- Standard output voltages: 5V, 12V, 15V, 28V
- Input transient protection per MIL-STD-704
- Integrated EMI filtering per MIL-STD-461
- High power density
- Low profile packaging
- Low noise
- Operates at full load through the entire -55°C to +100°C temperature range
- Contact factory for additional options and special units

## Electrical Specifications

DC Input Characteristics	
Input	16 to 36 VDC; 40 VDC maximum with no damage
EMI/RFI	Designed to meet the requirements of MIL-STD-461D; CE102
Input Transient Protection	Per MIL-STD-704D
Output Power	75 Watts (see Output Power Table below)
Output Voltage	+5V VDC to 28 VDC (see Output Power Table below)
Efficiency	70% minimum
Line Regulation	Within 0.1% for low to high line changes at constant load
Load Regulation	0.1% for 0 to 100% of rated load at nominal input line
PARD (Noise and Ripple)	50 mV p-p typical; 100 mV p-p maximum for 5 V outputs (20 MHz bandwidth); 1% of the output voltage, with a maximum of 200 mV p-p, for all other outputs (20 MHz bandwidth)
Load Transient Recovery	Output voltage returns to regulation limits within 0.5 msec (typical), half to full load
Load Transient Under/Overshoot	0.35 V maximum from nominal output voltage set point for 3.3 and 5 V outputs; all other outputs are 5%
Short Circuit Protection	Under any short circuit condition, output voltage drops to less than 1 V with automatic recovery
Current Limiting	120% $\pm$ 10% typical
Over Voltage Protection	Automatic electronic shutdown if voltage exceeds 125% $\pm$ 10%
Remote Error Sensing	Compensates for up to 0.5 V drop on output leads, on main output only
Remote Turn On/Off	TTL logic 1 inhibits (turns off) the output; a floating input acts as a logic 0 (output on)
Isolation Voltage	500 VDC input to output and input to case; 100 VDC output to case
Insulation Resistance	50 Mega Ohm at 50 VDC

All specifications are subject to change without notice.

## Output Power

Volts	Amps
5.0	15
12.0	6.3
15.0	5.0
28.0	2.67

## Additional Specifications

Physical/Environmental	
Temperature Range	Operating: -55°C to +100°C at 100% load (temperature measured at baseplate, conduction via baseplate only); Storage: -55°C to +125°C
Temperature Coefficient	0.01% per °C
Shock	30 G's each axis per MIL-STD-810C, Method 516.2, Procedure 1; Hammer shock per MIL-S-901C
Acceleration	6 G's per MIL-STD-810C, Method 513.2, Procedure 11; 14 G's per Procedure 1
Vibration	Per MIL-STD-810C, Method 514.2, Procedure 1A
Reliability (MTBF)	200,000 hours, ground benign, at 50°C baseplate
Humidity	95% at 71°C per MIL-STD-810C, Method 507.1 (non-condensing)
Altitude	40,000 feet per MIL-STD-810C, Method 504.1, Category 6 Equipment
Dimensions	See Mechanical Dimensions Table, page 4
Salt & Fog	Per MIL-STD-810C, Method 509.1
Sand/Dust/Fungus	Per MIL-STD-810C
Enclosure	Aluminum housing to aluminum baseplate
Finish	Cover: black anodized; Baseplate: chemfilm
Interface	Connections via a D-subminiature connector (see Connector Specifications Table below)
Weight	11 ounces; typical

All specifications are subject to change without notice.

## Pinout Designations (J1)


Pin No.	Designation	Pin No.	Designation
1	+INPUT	14	-INPUT
2	+INPUT	15	-INPUT
3	+INPUT	16	-INPUT
4	N/C	17	CHASSIS GND
5	+TTL (ON/OFF)	18	N/C
6	-TTL (ON/OFF)	19	-SENSE
7	+SENSE	20	+OUTPUT
8	+OUTPUT	21	+OUTPUT
9	+OUTPUT	22	+OUTPUT
10	+OUTPUT	23	-OUTPUT
11	-OUTPUT	24	-OUTPUT
12	-OUTPUT	25	-OUTPUT
13	-OUTPUT		

## Connector Specifications


Connector	Part # - Series
Unit	DBMME25PR
Mating	DBMM25S

## Output Wiring Diagram

### Single Output

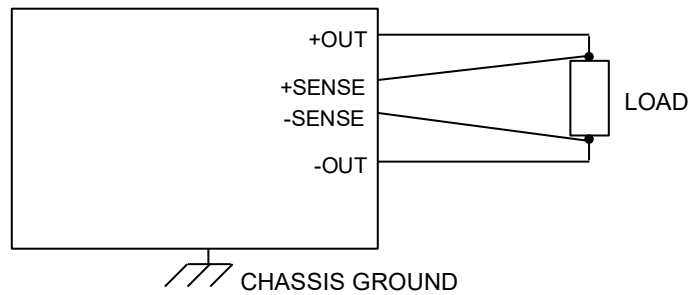

## Mechanical Layout

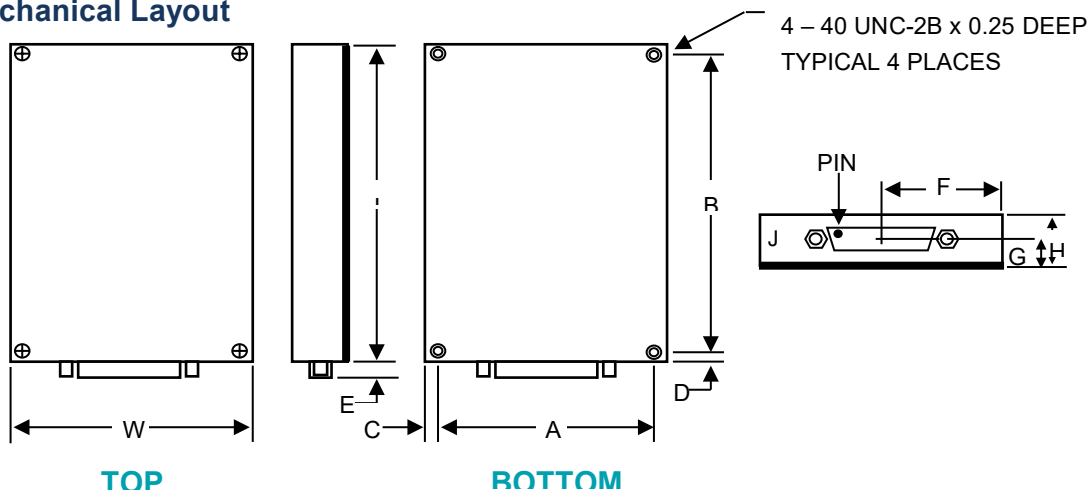

See tables below for Mechanical Dimensions.

## Mechanical Dimensions

Units	W	L	A	B	F
inches	3.00	3.85	2.600	3.450	1.50
mm	76.20	97.79	66.04	87.63	38.1

## Additional Dimensions

Dimension	Inches	Millimeters
C & D	0.2	5.1
E	0.23	5.84
G	0.455	11.56
H	0.8	20.3

## Ordering Information

<u>55</u>	<u>K</u>	<u>X1</u>	--	<u>XXX</u>	--	<u>M</u>	<u>X</u>	<u>XX</u>
								Code See Table below for special options
								Options 0 = Standard Testing (Includes ESS Temperature Cycling per NAVMAT). 1 = Standard Testing plus ESS Vibration Testing (per NAVMAT).
								Reliability M = COTS-MIL-Type: -55°C to +100°C; MIL-Type Components. Designed to meet the requirements of MIL-STD-461C and MIL-STD-810C. Designed per NAVMAT Guidelines.
								Output Voltage Single 005 = +5Vdc 012 = +12Vdc 015 = +15Vdc 028 = +28Vdc
								Output Config S1 = Single
								Wattage = 75 Watts Max
Series 55 = DC/DC (+28Vdc)								

**Example:** 55KS1-028M0 = DC/DC (Low Voltage); 75 Watt; Single Output; +28V; COTS-MIL-Type; Standard Testing

### Code Table for Special Orders

Code	Description
03	55KS1-XX Potted. Designed to meet MIL-STD-810C, Procedure 1, Category 6, 70,000 feet. (Add 3 ounces max to weight of unit.)

**Consult Factory for Additional Options and/or Special Units**